

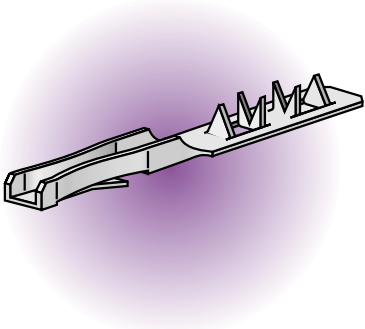


Female contacts

HIGH INSERTION FORCE REF. 10025

- Increased retention for high vibration applications, which results in a reduced number of mating cycles.
- Recommended for a small amount of contacts (2 to 10 contacts).

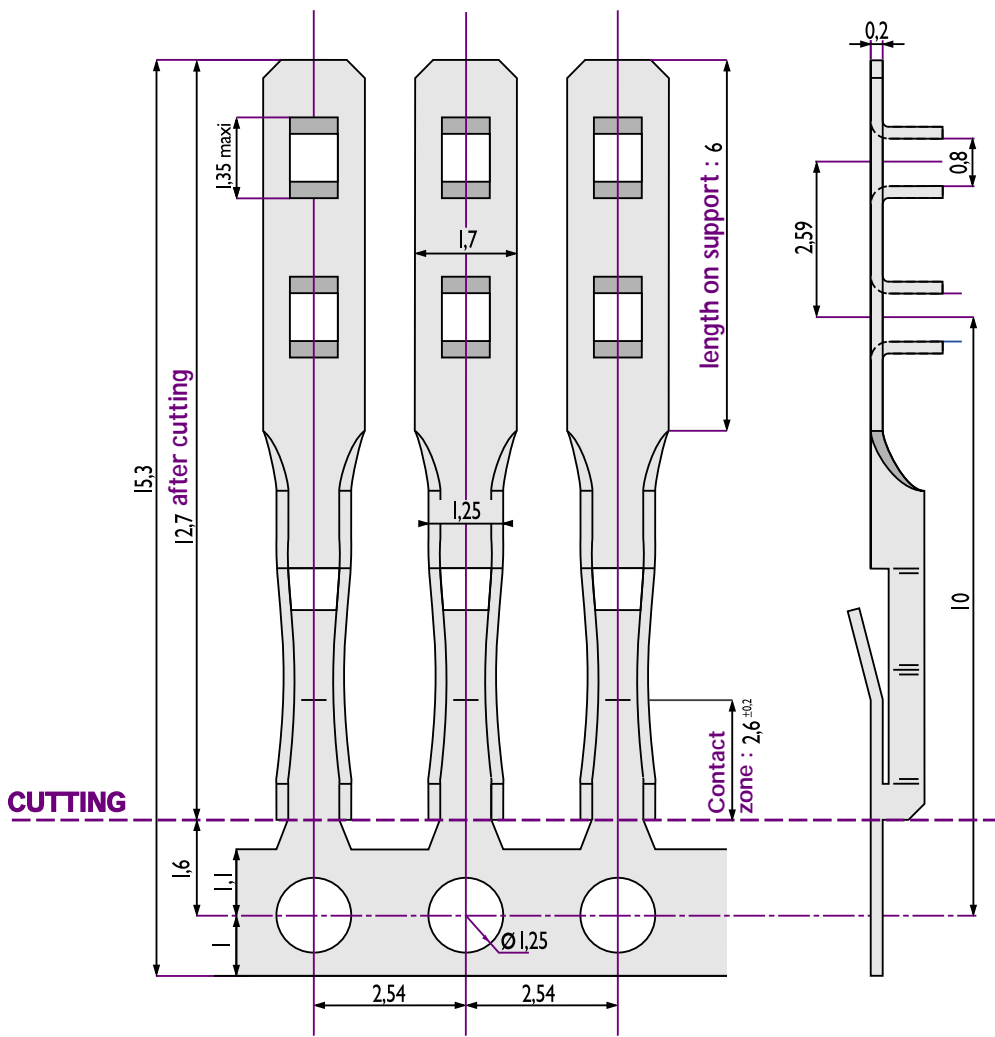

Dimensions in mm

REF.	PLATING	REEL
10025-12	Tin plated	35 000 contacts
10025-32	Selective gold plated	35 000 contacts
OTHER PLATINGS ON REQUEST		