
CRIMPFLEX® presses

Other documents: product data sheet & CrimpFlex® Crimping Guidelines

PNEUMATIC PRESS REF. 10500-SA(P)

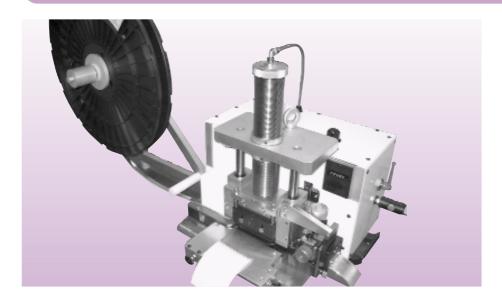

GENERAL DATA

- Dimensions without reel (L x w x h): 76 x 60 x 48 cm.
- Dimensions with reel (L x w x h): 96 x 60 x 63 cm.
- Net weight : 63 kg, Gross weight : 83 kg.
- Air pressure of 6 bars : dry air recommended, gauge G1/4.
- No electrical requirement.
- Approximate capacity: 30 cycles / minute.

OPERATION

- From 1 to 36 contacts are crimped at one time. The number of contacts to be crimped is determined by turning a dial on the front of the machine.
- This machine is also equipped with a downcounter which allows to pre-select a precise number of operations and stops automatically once it is back to zero.
- The press is operated by foot pedal.

TOOLING

- The machine can be delivered with three different tooling : one for male solder tabs, one for female contacts and one for square male pins.
- The change of tooling is simple and quick.

PRESS	TOOLING	PART NUMBERS
10500-SA	MALE	10041 - 10241 - 10067 - 10167 - 12887
	FEMALE	10025 - 11506 - 11612 - 13595 - 14106
10500-SAP	SQUARE MALE	12410 – 13756
	MALE	10041 - 10241 - 10067 - 10167 - 12887
	FEMALE	10025 - 11506 - 11612 - 13595 - 14106